

# FPD610

## High Sensitivity Fast PIN Photodetector

**MenloSystems**



### KEY SPECIFICATIONS

- Frequency Range DC-600 MHz
- Spectral Sensitivity from 400-1000 nm or 950-1650 nm
- 3 dB Bandwidth DC-500 MHz
- Rise Time below 1 ns

### APPLICATIONS

- Efficient Homodyne and Heterodyne Extraction of Optical Beat Signals at Frequencies up to 600 MHz
- Detection of Low Light Level Signals
- Characterization of Pulsed or Modulated Light Sources Features
- Detection of Chopped Light Sources

### FEATURES

- Highest Signal-to-Noise Ratio with true DC
- Flat Spectral Response (less than 3 dB up to 500 MHz)
- OEM Integration
- Fiber Coupled or Free Space Optical Input
- Integrated Low Noise Transimpedance Amplifier
- Easy-to-use Package
- Low Noise Power Supply included

The high sensitivity ultrafast PIN photodetector FPD610 product family combines broad bandwidth and high gain at frequencies up to 600 MHz. These photodetectors are easy-to-use Si- or InGaAs-PIN photodiode packages with an integrated high-gain, low-noise transimpedance amplifier.


The 3 dB bandwidth of the DC-coupled device is 500 MHz.

Models for both visible and near infrared range are available, both with either free space or fiber coupled optical input. The compact design of these detectors allows for easy OEM integration. Included with each amplified photodetector is a low noise power supply, which features a universal AC input.


## FPD610

Response to a pulse train with sub 250 fs pulses at 1560 nm and 200 nW optical average power:


Frequency Characteristics

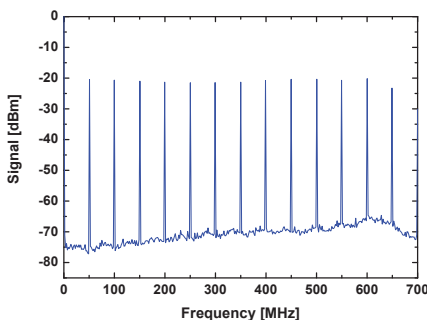

Time Characteristics

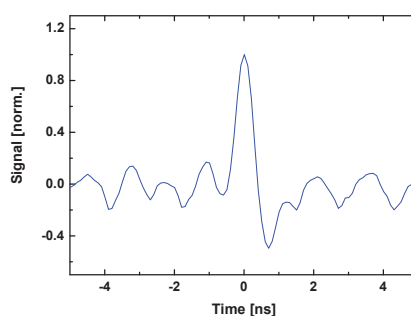

Rise Time

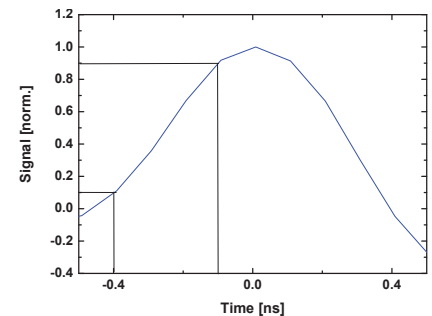

# FPD610



## High Sensitivity Fast PIN Photodetector

### SPECIFICATIONS

FPD610	-FC-VIS	-FS-VIS	-FC-NIR	-FS-NIR
Detector Type	Si	Si	InGaAs	InGaAs
Optical Input	fiber coupled: FC/PC connector	free space	fiber coupled: SMF28 pigtail with FC/APC	free space
Spectral Range	400-1000 nm	400-1000 nm	950-1650 nm	950-1650 nm
Saturation Limit	<100 $\mu$ W	<100 $\mu$ W	<100 $\mu$ W	<100 $\mu$ W
Damage Threshold	3 mW	3 mW	3 mW	3 mW
Detector Diameter	0.25 mm	0.4 mm	-	0.08 mm
Frequency Range	DC-600 MHz	DC-600 MHz	DC-600 MHz	DC-600 MHz
3 dB Bandwidth	DC-500 MHz	DC-500 MHz	DC-500 MHz	DC-500 MHz
Rise Time	1 ns	1 ns	1 ns	1 ns
Max. Gain	$2 \times 10^6 V_{\text{Peak-Peak}} / \sqrt{W_{\text{Input}}}$	$2 \times 10^6 V_{\text{Peak-Peak}} / \sqrt{W_{\text{Input}}}$	$2 \times 10^6 V_{\text{Peak-Peak}} / \sqrt{W_{\text{Input}}}$	$2 \times 10^6 V_{\text{Peak-Peak}} / \sqrt{W_{\text{Input}}}$
Dark State Noise Level <small>not integrated</small> (up to 5 MHz / 5-600 MHz)	-80 dBm/ $\sqrt{\text{Hz}}$ / -100 dBm/ $\sqrt{\text{Hz}}$	-80 dBm/ $\sqrt{\text{Hz}}$ / -100 dBm/ $\sqrt{\text{Hz}}$	-80 dBm/ $\sqrt{\text{Hz}}$ / -100 dBm/ $\sqrt{\text{Hz}}$	-80 dBm/ $\sqrt{\text{Hz}}$ / -100 dBm/ $\sqrt{\text{Hz}}$
NEP (calculated)	11.9 pW/ $\sqrt{\text{Hz}}$	11.2 pW/ $\sqrt{\text{Hz}}$	5.6 pW/ $\sqrt{\text{Hz}}$	6.6 pW/ $\sqrt{\text{Hz}}$
Output Impedance	50 $\Omega$	50 $\Omega$	50 $\Omega$	50 $\Omega$
Output Coupling	DC	DC	DC	DC
Output Signal	0-1 V	0-1 V	0-1 V	0-1 V
Output Connector	SMA female	SMA female	SMA female	SMA female
Supply Voltage	+5 V    -12 V	+5 V    -12 V	+5 V    -12 V	+5 V    -12 V
Max. Current Consumption	<250 mA    <50 mA	<250 mA    <50 mA	<250 mA    <50 mA	<250 mA    <50 mA
Operating Temperature	10-40 $^{\circ}\text{C}$	10-40 $^{\circ}\text{C}$	10-40 $^{\circ}\text{C}$	10-40 $^{\circ}\text{C}$
Storage Temperature	-20 to +85 $^{\circ}\text{C}$	-20 to +85 $^{\circ}\text{C}$	-20 to +85 $^{\circ}\text{C}$	-20 to +85 $^{\circ}\text{C}$
Storage Humidity <small>(RH= relativ humidity)</small>	10-90 % RH	10-90 % RH	10-90 % RH	10-90 % RH
Device Dimensions	60 x 50 x 20 mm <sup>3</sup>	60 x 50 x 20 mm <sup>3</sup>	60 x 50 x 20 mm <sup>3</sup>	60 x 50 x 20 mm <sup>3</sup>

### ORDERING INFORMATION

Product Code	FPD610-FC-VIS	FPD610-FS-VIS	FPD610-FC-NIR	FPD610-FS-NIR
Price	1950 EUR	1950 EUR	1950 EUR	1950 EUR

Prices and specifications are subject to change without notice. Custom modifications are available, please inquire.



**Menlo Systems GmbH**  
T+49 89 189 166 0  
sales@menlosystems.com

**Menlo Systems, Inc.**  
T+1 973 300 4490  
ussales@menlosystems.com

**Thorlabs, Inc.**  
T+1 973 579 7227  
sales@thorlabs.com

**Menlo K.K.**  
T+81 9074092021  
jpsales@menlosystems.com

**Menlo Systems China**  
chinasales@menlosystems.com

