

# C-Fiber

## Femtosecond Fiber Laser 1560 nm




Menlo Systems' fiber-based femtosecond laser sources integrate the latest achievements in fiber technology into easy-to-use products. Menlo Systems' unique figure 9® design results in reproducible and long-term stable operation. It is based on the well-established Nonlinear Amplifying Loop Mirror (NALM) mode locking mechanism. Both oscillator and amplifier use polarization maintaining (PM) fiber components only, ensuring excellent stability and low-noise operation. The laser is maintenance free, user installed and ready to use at the press of a single button. Customize your laser with the available options to match the requirements of your application. Complete synchronization solution is available with laser and synchronization electronics. All components from one supplier with full automation guarantees hands off operation and more time for your experiments.

### PERFORMANCE DATA


#### Amplitude noise

< 0.5% rms (over 24h)

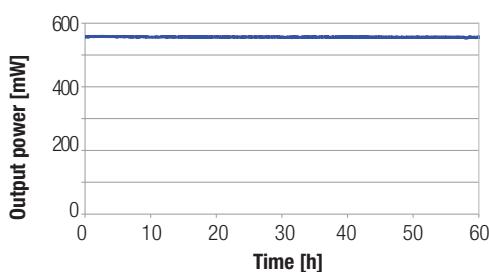

#### Reproducibility

Identical and consistent laser performance

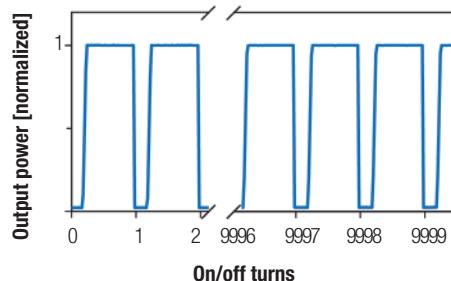

**MenloSystems**

### KEY SPECIFICATIONS

- Wavelength 1560 nm
- Output Power >500 mW
- Pulse Length <90 fs
- Repetition Rate 50-250 MHz

### APPLICATIONS

- Synchronization and Timing
- Ultrafast Spectroscopy
- Supercontinuum Generation
- Material Characterization
- Testing at Telecom Wavelengths

### FEATURES

- High Stability
- Low Amplitude and Phase Noise
- All-PM Solution
- Single Mode-Lock State
- Menlo figure 9® Technology

### OPTIONS

- **SYNC100**  
**Repetition Rate Synchronization**  
Tunable cavity length by high-bandwidth piezo-controlled synchronization

- **RRE-SYNCRO**  
**Repetition Rate Stabilization**  
Feedback electronics to phase lock pulses to an external clock (see separate data sheet for more details)

- **VARIO**  
**User-Defined Repetition Rate**  
Factory-set value selectable in the 50-250 MHz range

- **MULTIBRANCH**  
**Additional Seed Ports**  
Seeding of multiple amplifiers with optional subsequent frequency conversion to cover multiple wavelengths

# C-Fiber

MenloSystems

## Femtosecond Fiber Laser 1560 nm

### SPECIFICATIONS

	C-FIBER	C-FIBER HIGH POWER
Center Wavelength	1560 nm $\pm$ 20 nm	1560 nm $\pm$ 20 nm
Average Power	>100 mW	>500 mW
Pulse Energy	>1 nJ	>5 nJ
Pulse Width		<90 fs
Repetition Rate		100 MHz (50-250 MHz with VARIO)*
Repetition Rate Instability		<1 ppm over 20 hours at constant temperature
Timing Jitter		<2 fs [rms, 10 kHz.. 1 MHz]
Output Port	fiber-coupled (FC/APC)	free space
Additional Fiber-Coupled Seed Port		1 (up to 4 with MULTIBRANCH)
Polarization	linear, PM fiber	linear, s-polarized
Beam Height	n.a.	102 mm

\*Please inquire for your specific combinations of average power, pulse duration and repetition rate.

### REQUIREMENTS

Operating Voltage	100/115/230 VAC	
Frequency	50 to 60 Hz	
Power Consumption	120 VA	
Cooling Requirements	no water cooling is required	
Laser Head Stabilization	actively temperature stabilized	
Operating Temperature	15 °C - 35 °C	
Laser Head Dimensions/Weight	413 x 90 x 178 mm <sup>3</sup> / 7 kg	413 x 120 x 178 mm <sup>3</sup> / 10 kg
Control Unit Dimensions/Weight	448 x 132 x 437 mm <sup>3</sup> / 10 kg	448 x 132 x 437 mm <sup>3</sup> / 12 kg
Warm-Up Time	<60 s	

### ORDERING INFORMATION

Product Code	C-Fiber	C-Fiber HIGH POWER
--------------	---------	--------------------

Please call for pricing. Specifications are subject to change without notice. Custom modifications are available, please inquire.

MenloSystems

Menlo Systems GmbH  
T+49 89 189 166 0  
sales@menlosystems.com

Menlo Systems US  
T+1 303 635 6406  
ussales@menlosystems.com

Menlo Systems Japan  
T+81 907 409 20 21  
jpsales@menlosystems.com

Menlo Systems China  
T+86 21 6071 1678  
chinasales@menlosystems.com



Invisible laser radiation  
avoid exposure to beam  
Class 3B laser

